

## PROLED FLAT PANEL LIGHT




An exemplary for modern interior, this light can easily merge with your false ceiling giving it the most elegant look. This fitting also provides colour uniformity and accurate colour rendering, with an even light distribution and perfect flare.



FLAT PANEL 2'X2' (RECESS / SURFACE)

MPLS/MPLSS 02 45 W

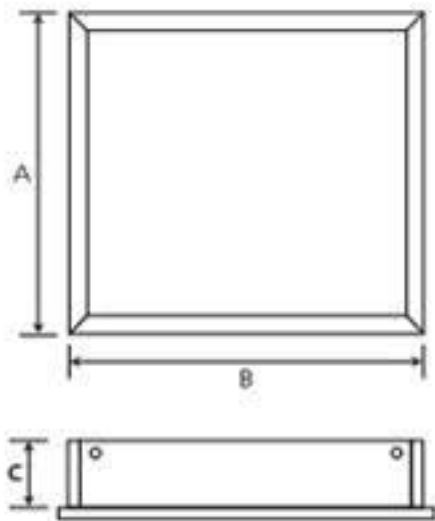

### SALIENT FEATURES

- Energy saving compared to conventional fluorescent fixtures
- Durability - longer life time
- High power factor and low THD
- Soft and bright diffused light output
- Eco-friendly, no harmful UV and IR Radiation
- High CRI and Lumen Output
- Available in cool white and warm white colours

Catalogue Reference	Wattage (W)	Dimension (mm)			Cut Out (mm)
		A	B	C	
MPLS 02 45W	45W	595	595	45	590x590
MPLSS 02 45W	45W	595	595	50	-

**CONSTRUCTION** : ABS + PC Back, Aluminium Frame and PS Cover

**INSTALLATION** : To be recessed in false ceiling with the help of spring loaded clamps.

**APPLICATION** : Offices, Hospitals, Banks, R&D Centres, Laboratories, Lounges etc.

**ELECTRICAL DATA** : Nominal Voltage - AC 240V  
Frequency Range - 50Hz-60Hz

### TECHNICAL DATA

Cat. Ref.	System Wattage (W)	Lumen Output (lm)	CRI	System Efficiency	Beam Angle	Protection Grade (IP)
MPLS 02 45W	45W	3900	≥70	80%	120°	IP20
MPLSS 02 45W	45W	3900	≥70	80%	120°	IP20