

PROLED PANEL LIGHT



Designed to fit your interiors perfectly, Mescab Panel Light can easily be installed on low height ceilings. This energy efficient LED provides high quality bright diffused light giving your office, homes, conference halls a classy look.



RECESS ROUND

MPLR 02 3 6 9 12 15 18 W



SALIENT FEATURES

- Energy saving upto 85% compared to standard halogen and incandescent lamp
- Durability - longer life time
- Uniform, soft and bright diffused light output
- Eco-friendly, no harmful UV and IR Radiation
- High CRI and Lumen Output
- Available in cool white and warm white colours

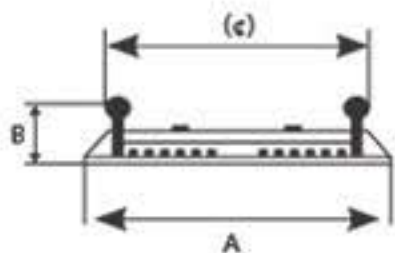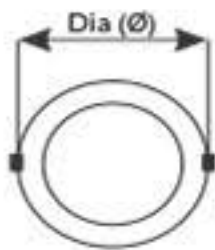

Catalogue Reference	Wattage (W)	Dimension (mm)		Cut Out (mm)
		A	B	
MPLR 02 03W	3W	90	20	75
MPLR 02 06W	6W	120	20	110
MPLR 02 09W	9W	146	20	135
MPLR 02 12W	12W	170	20	160
MPLR 02 15W	15W	200	20	185
MPLR 02 18W	18W	225	20	210

CONSTRUCTION : Aluminium + PMMA

INSTALLATION : To be recessed in false ceiling with the help of spring loaded clamps.

APPLICATION : Offices, Residential, Showrooms, Shopping Malls, Corridors etc.

ELECTRICAL DATA : Nominal Voltage - AC 240V
Frequency Range - 50Hz-60Hz

TECHNICAL DATA

Cat. Ref.	System Wattage (W)	Lumen Output (lm)	CRI	System Efficiency	Beam Angle	Protection Grade (IP)
MPLR 02 03W	3W	180	≥70	80%	120°	IP20
MPLR 02 06W	6W	380	≥70	80%	120°	IP20
MPLR 02 09W	9W	630	≥70	80%	120°	IP20
MPLR 02 12W	12W	840	≥70	80%	120°	IP20
MPLR 02 15W	15W	1200	≥70	80%	120°	IP20
MPLR 02 18W	18W	1440	≥70	80%	120°	IP20